


Recommended Specifications

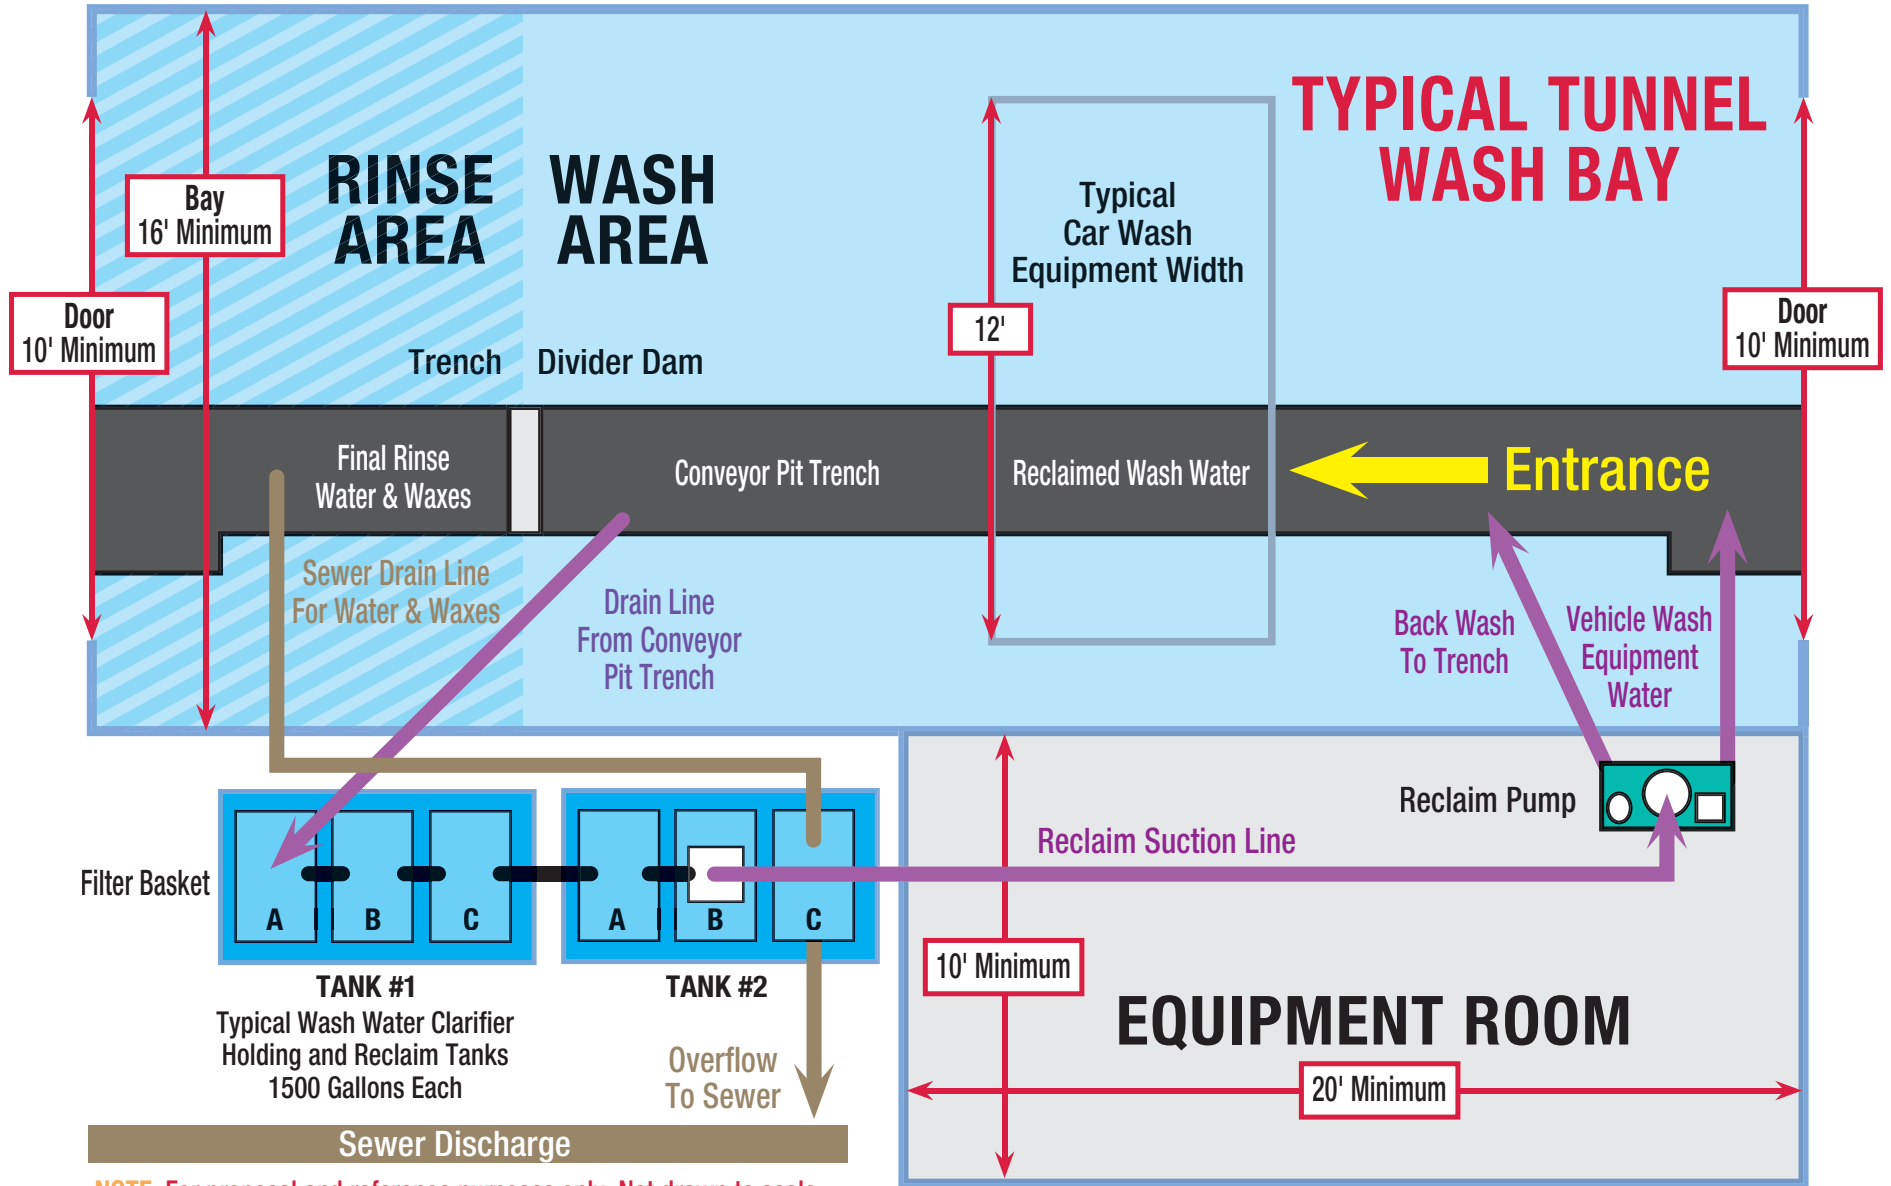

NOTE: For proposal and reference purposes only. Not drawn to scale.

ECONOCRAFT
WORLDWIDE CAR WASH MFG., INC.

For customer service, please call: 718-585-6463 or Toll Free: 800-344-5154

General Requirements

- Electric:**
- 208-220 Volt – 60 Hertz — 3 phase 400 Amp
 - 460-480 Volt – 60 Hertz — 3 phase 200 Amp
 - 575 Volt – 60 Hertz — 3 phase 200 Amp
 - 380 Volt – 50 Hertz — 3 phase 200 Amp

- Water:**
- 45 PSI – 120 GPM recommended

- Air:**
- 45 PSI – 120 GPM recommended

- Tunnel Bay:**
- Width – 16' minimum 18' or larger recommended
 - Ceiling Height – 10' minimum (14' recommended)
 - Door Width – 10' minimum (12' recommended)

Note: Less than 16' width please advise Econocraft

- Equipment Room:**
- 10' x 20' or larger recommended

Note: Less than 10' width please advise Econocraft

- Tunnel Entrance:**
- Minimum 32' turning radius recommended

Conveyor Pit Requirements

